

2006-2010 5 SERIES (E60)

AUX Activator Instructions

Important Tips

After the successful activation,wait for 5 seconds,and Please DONOT disconnect the wires between the Activator and the Car,make sure keep the connection!Then remove the car key and lock the car,Wait after the "P" Gear(Parking) indicator is off, power on the car again.Then get on the car to check the AUX function!



1. Original Monitor
(Power off before installing).



2. Remove the fixed screws
from original monitor.



3. Pry loose and take out the
original monitor.



4. Pry loose and take out the
decoration strip.



5. Remove the fixed screws of
the panel.



6. Pry and take out the panel of
the storage box.



7. Remove the fixed screws
from the Host.




8. Take out the original harness
and plug three AUX wires into
harness as picture show.



9. Connect well The AUX
activator with original monitor.



10. Plug in the Activator and
start the car. Long press the
activation button until the
indicator light is steady on,
and "AUX" function will
display on original menu.

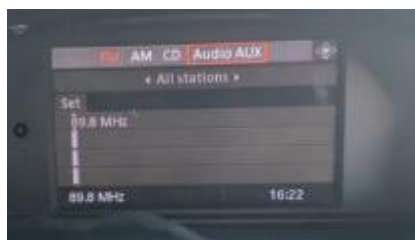

11. After successful activation,wait
5seconds(do not disconnect the
wiring),then remove the car key
and lock the car,wait after the "P"
Gear(Parking) indicator is off,
and then start the car again and
check "AUX" function.



12. Connect phone with AUX
IN to full test AUX function.